

**KENWOOD**  
HI/FI STEREO COMPONENTS

# SERVICE MANUAL

**KL-777X(KL-7070X)**

**KL-888X(KL-8080X)**

**KL-999X(KL-9090X)**

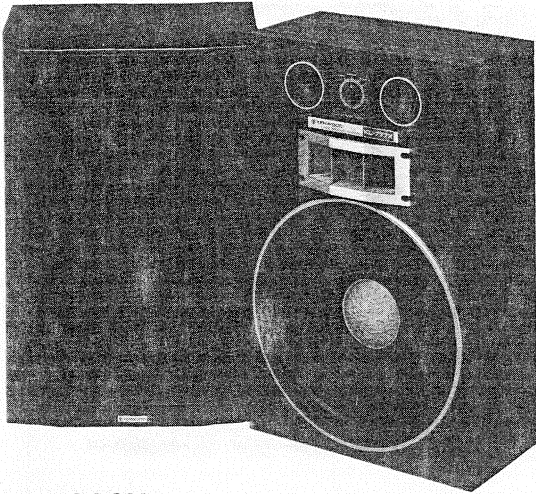


Photo is KL-999X


**SPEAKER SYSTEM**

## EXTERNAL VIEW/REPAIR

<KL-777X>



<KL-999X>

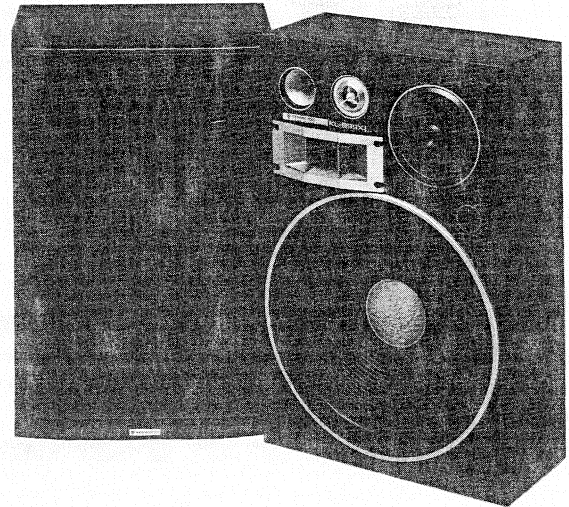


<KL-888X>





When replacing super tweeter of KL-999X having the serial No. before 961000 remove the screw fixing the super tweeter behind Model name plate.

### DISASSEMBLY OF ATTENUATOR

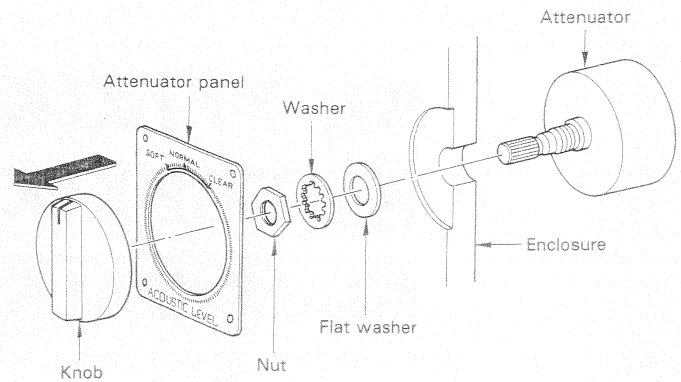

### PACKING

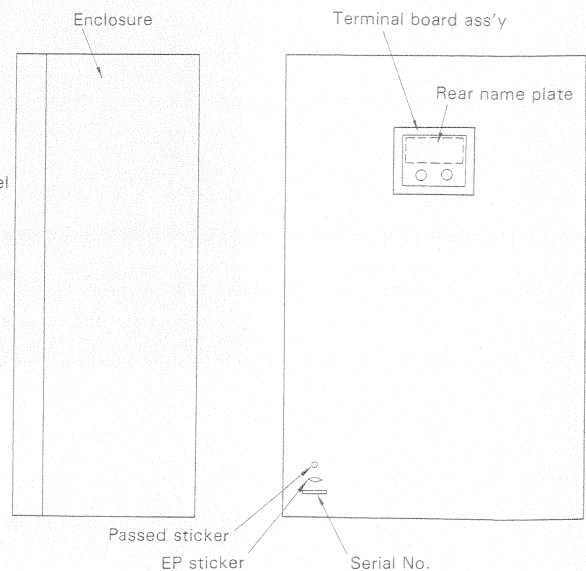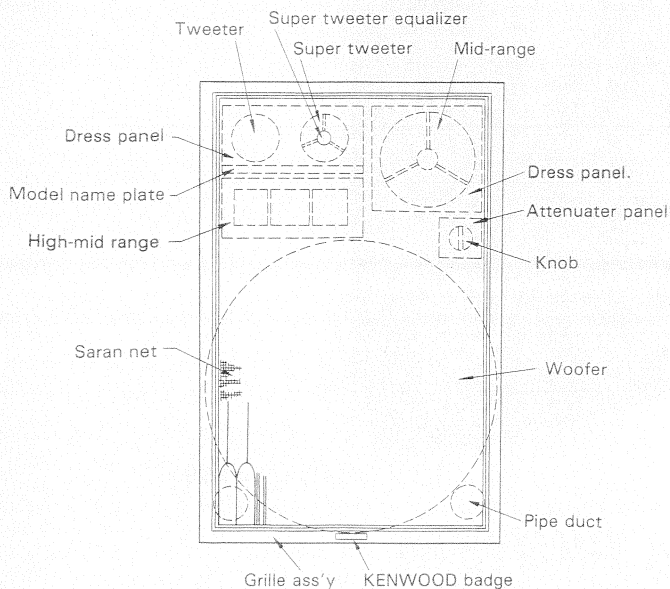

PARTS LIST

PARTS LIST

M: other area.  
P: Canada U: PX, W: Europe (KL-0000X) H: Audio Club (KL-0000X)

☆:New Parts.


Ref. No.	Parts Number			Description	Remarks
	KL-777X	KL-888X	KL-999X		
—	A29-0288-05	A29-0289-05	A29-0289-05	Attenuator panel ass'y	☆
—	B06-0118-02	B06-0117-01	B06-0117-01	Grille ass'y	☆
—	—	—	B40-1842-00	Model name plate (P,U,M)	☆
—	—	—	B40-1843-00	Model name plate (W,H)	☆
—	B46-0055-20	B46-0055-20	B46-0055-20	Warranty card (P)	☆
—	B46-0062-20	B46-0062-20	B46-0062-20	Warranty card (U,H)	☆
—	B46-0063-00	B46-0063-00	B46-0063-00	Warranty card (U)	☆
—	B50-2126-00	B50-2122-00	B50-2120-00	Instruction manual (U)	☆
—	B50-2127-00	B50-2124-00	B50-2121-00	Instruction manual (P,M)	☆
—	B50-2128-00	B50-2123-00	B50-2125-00	Instruction manual (W,H)	☆
—	E30-1003-05	E30-1003-05	E30-1003-05	Speaker cord (U,M,H)	☆
—	H01-3510-04	H01-3515-04	H01-3520-04	Carton box (U)	☆
—	H01-3511-04	H01-3516-04	H01-3521-04	Carton box (M)	☆
—	H01-3512-04	H01-3517-04	H01-3522-04	Carton box (W)	☆
—	H01-3513-04	H01-3518-04	H01-3523-04	Carton box (P)	☆
—	H01-3514-04	H01-3519-04	H01-3524-04	Carton box (H)	☆
—	H10-1978-03	H10-1978-03	H10-1978-03	Polystyrene foamed fixture (R)	☆
—	H10-1979-03	H10-1979-03	H10-1979-03	Polystyrene foamed fixture (L)	☆
—	H12-0818-04	H12-0813-04	H12-0813-04	Buffer fixture	☆
—	H20-0831-04	H20-0832-04	H20-0832-04	Polyethylene cover	☆
—	H21-0481-04	H21-0482-04	H21-0482-04	Polystyrene foamed sheet	☆
—	K23-0517-05	K23-0517-05	K23-0517-05	Knob	☆
—	J19-0988-04	J19-0988-04	J19-0988-04	Grille holder	☆
—	N09-0460-05	N09-0081-05	N09-0081-05	Speaker mounting screw	☆
—	N14-0057-05	N14-0057-05	N14-0057-05	T nut (M4)	☆
—	—	T03-0086-05	T03-0086-05	Speaker unit (Super tweeter)	☆
—	—	T06-0075-05	T06-0076-05	Speaker unit (Mid-range)	☆
—	T10-0104-05	T10-0105-05	T10-0105-05	Speaker unit (Woofer)	☆
—	T14-0064-05	T14-0064-05	T14-0065-05	Speaker unit (High-mid)	☆
—	T03-0084-05	T03-0085-05	T14-0066-05	Speaker unit (Tweeter)	☆
—	X21-2140-80	X21-2130-80	X21-2120-80	Network ass'y (U,M,P)	☆
—	X21-2142-81	X21-2132-81	X21-2122-81	Network ass'y (W,H)	☆

NETWORK PARTS LIST


Ref. No.	Parts No.	Description	Re- marks
KL-777X			
C1	C23-2015-56	Non-pole electro 1.5μF 100WV	☆
C2	C90-0633-05	Non-pole electro 3.3μF 100WV	
—	E29-0267-03	Terminal board ass'y (KL-777X)	☆
—	E29-0268-03	Terminal board ass'y (KL-7070X)	
L1	L38-0091-05	Coil (0.5mH)	☆
R1	R44-9703-06	Wire wound 3Ω ± 10% 10W	
R2	R44-9702-06	Wire wound 2Ω ± 10% 10W	☆
—	S01-2201-05	Rotary switch	
KL-888X			
C1	C90-0635-05	Non-pole electro 6.8μF 100WV	☆
C2	C90-0634-05	Non-pole electro 4.7μF 100WV	
C3	C23-2022-56	Non-pole electro 2.2μF 100WV	
—	E29-0270-03	Terminal board ass'y (KL-888X)	☆
—	E29-0271-03	Terminal board ass'y (KL-8080X)	
L1	L38-0089-05	Coil (0.2mH)	☆
L2	L38-0091-05	Coil (0.5mH)	
R1,2	R44-9703-06	Wire wound 3Ω ± 10% 10W	
Ref. No.	Parts No.	Description	Re- marks
R3	R44-9701-06	Wire wound 1Ω ± 10% 10W	☆
R4	R44-9702-06	Wire wound 2Ω ± 10% 10W	
—	S01-2201-05	Rotary switch	☆
KL-999X			
C1	C90-0636-05	Non-pole electro 10μF 100WV	☆
C2	C23-2022-56	Non-pole electro 2.2μF 100WV	
C3	C90-0633-05	Non-pole electro 3.3μF 100WV	
C4	C23-2022-56	Non-pole electro 2.2μF 100WV	
—	E29-0272-03	Terminal board ass'y (KL-999X)	☆
—	E29-0273-03	Terminal board ass'y (KL-9090X)	
L1	L38-0090-05	Coil (0.35mH)	☆
L2	L38-0091-05	Coil (0.5mH)	
L3	L38-0089-05	Coil (0.2mH)	
R1	R44-9706-06	Wire wound 6Ω ± 10% 10W	☆
R2,3	R44-9702-06	Wire wound 2Ω ± 10% 10W	
R4	R44-9704-06	Wire wound 4Ω ± 10% 10W	
—	S01-2201-05	Rotary switch	☆

SCHEMATIC DIAGRAM

KL-777X (KL-7070X)

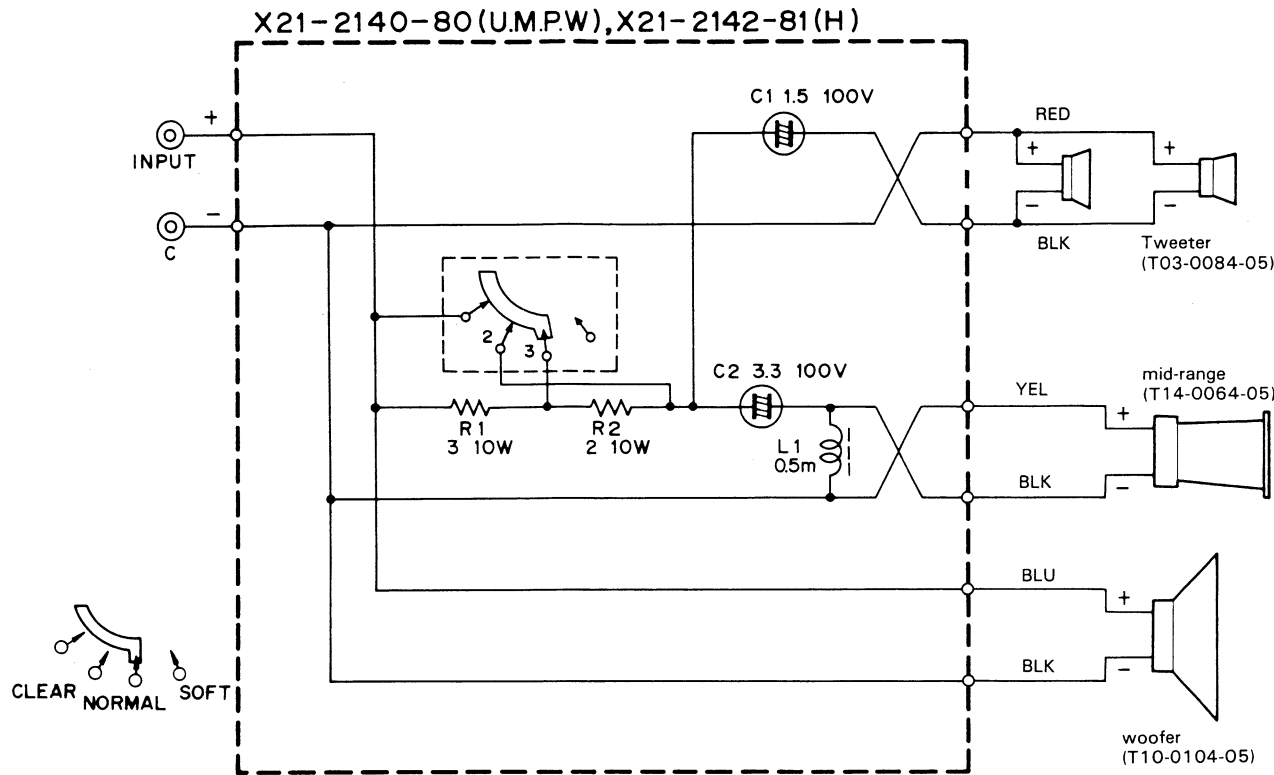

KL-888X (KL-8080X)

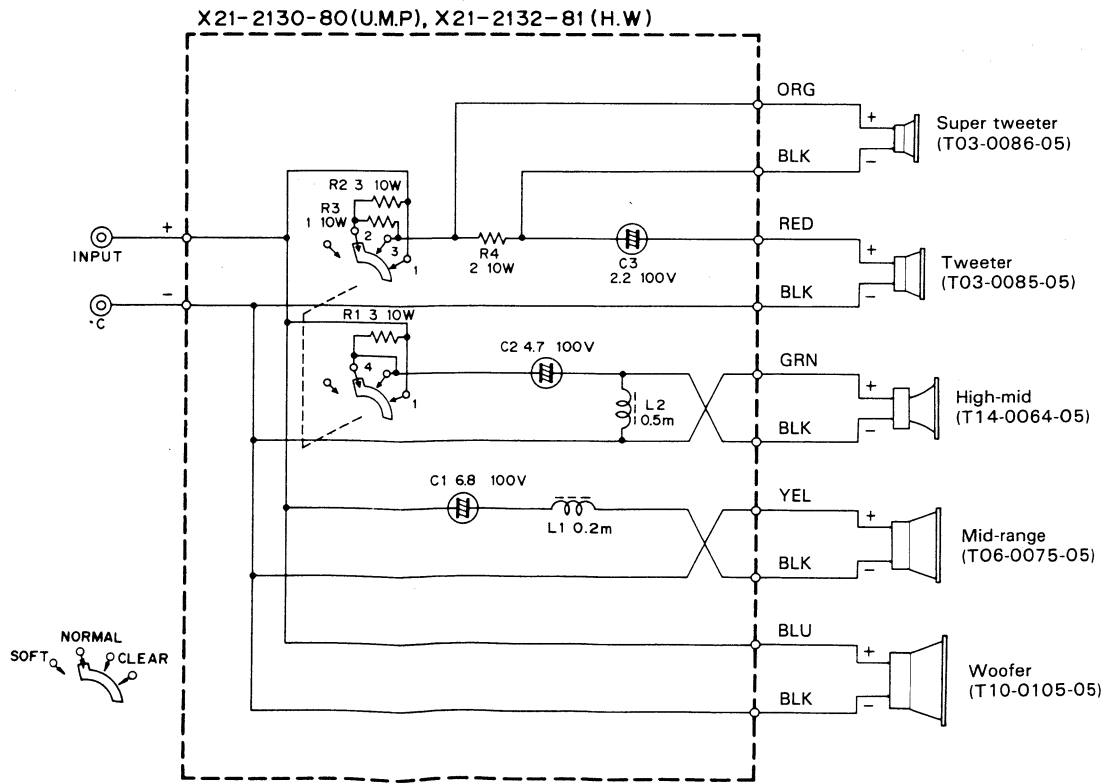


KL-777X-999X

KL-777X-999X KL-777X-999X


## SCHEMATIC DIAGRAM/PACKING

## SPECIFICATIONS

### KL-999X (KL-9090X)

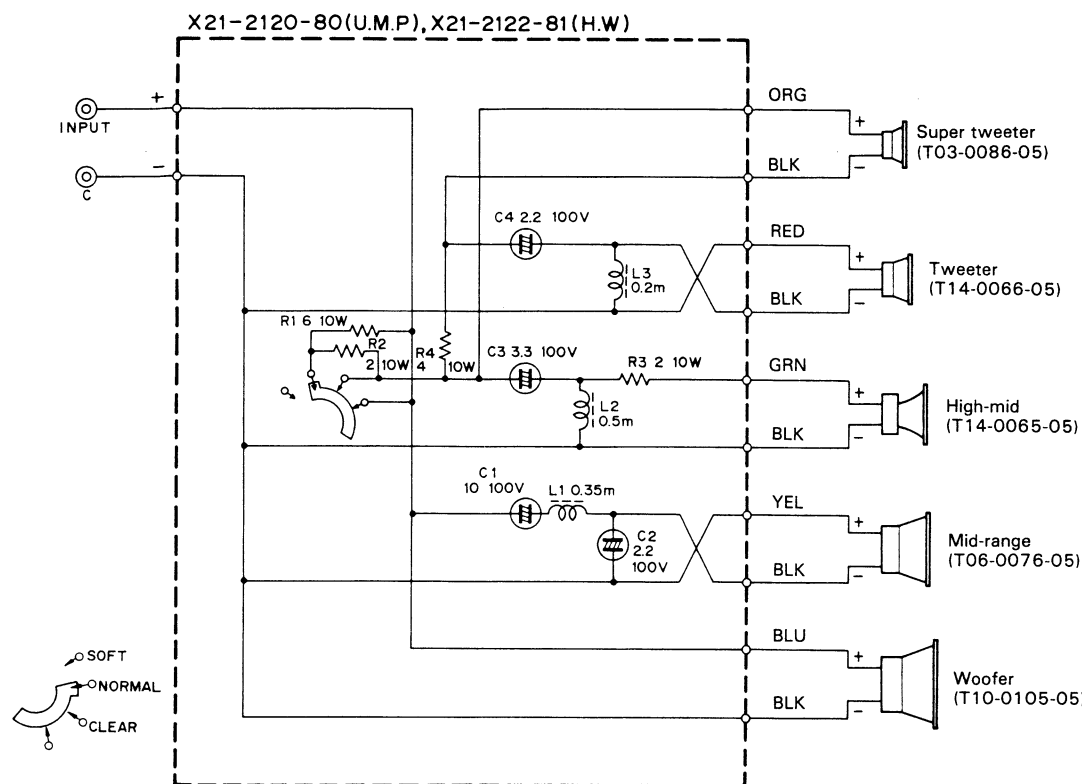

### EXTERNAL VIEW

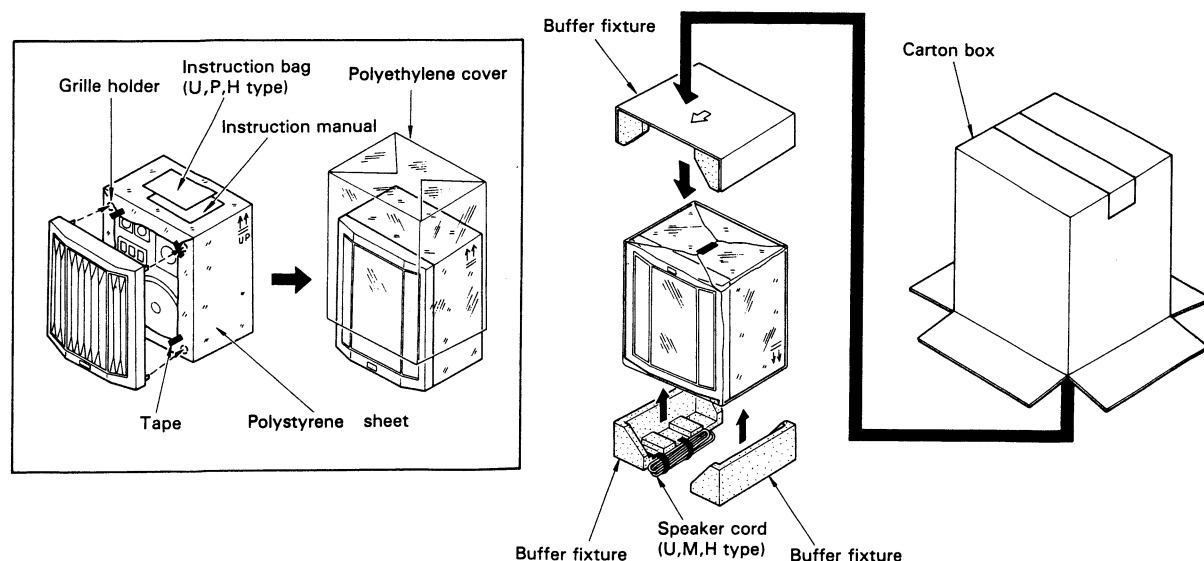

Note: Make the system up side down first, and then put the carton box from over it.

### < KL-777X >

System	3-Way, 4-Speaker System
Mounted Speakers	
Woofer	380 mm (15") Cone Type × 1
Mid Range	Exponential Horn Type with Diffuser × 1
Tweeter	65 mm (2-1/2") Cone Type × 2
Enclosure	Bass-Reflex Type
Peak Input Power	200 Watts
Nominal Input Power	100 Watts
Sensitivity	96 dB/W at 1m
Frequency Response	20 Hz to 21,000 Hz
Crossover Frequencies	2,000 Hz, 8,000 Hz
Impedance	8 Ohms
Additional Features	3 Step Acoustics Level Control
Dimensions	W: 417 mm (16-13/32") H: 648 mm (25-1/2") D: 272 mm (10-23/32")
Weight (Net)	16.5 kg (36.4 lbs.)
Enclosure Finish	Top, Side and Bottom are in Simulated Walnut-Grain Finish.

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

### < KL-888X >

System	5-Way, 5-Speaker System
Mounted Speakers	
Woofer	406 mm (16") Cone Type × 1
Mid Range	120 mm (5") Cone Type × 1
Mid-High Range	Exponential Horn Type with Diffuser × 1
Tweeter	65 mm (2-1/2") Cone Type × 1
Super Tweeter	30 mm (1-1/4") Cone Type × 1
Enclosure	Bass-Reflex Type
Peak Input Power	250 Watts
Nominal Input Power	125 Watts
Sensitivity	98 dB/W at 1m
Frequency Response	20 Hz to 22,000 Hz
Crossover Frequencies	3,000 Hz, 5,000 Hz 9,000 Hz, 15,000 Hz
Impedance	8 Ohms
Additional Features	3 Step Acoustics Level Control
Dimensions	W: 445 mm (17-17/32") H: 680 mm (26-25/32") D: 272 mm (10-23/32")
Weight (Net)	20.5 kg (45.2 lbs.)
Enclosure Finish	Top, Side and Bottom are in Simulated Walnut-Grain Finish.

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

### < KL-999X >

System	5-Way, 5-Speaker System
Mounted Speakers	
Woofer	406 mm (16") Cone Type × 1
Mid Range	160 mm (6-1/2") Cone Type × 1
Mid-High Range	Sectoral Horn Type × 1
Tweeter	Horn Type × 1
Super Tweeter	30 mm (1-1/4") Cone Type × 1
Enclosure	Bass-Reflex Type
Peak Input Power	300 Watts
Nominal Input Power	150 Watts
Sensitivity	98 dB/W at 1m
Frequency Response	20 Hz to 22,000 Hz
Crossover Frequencies	1,000 Hz, 4,000 Hz 8,000 Hz, 15,000 Hz
Impedance	8 Ohms
Additional Features	3 Step Acoustics Level Control
Dimensions	W: 445 mm (17-17/32") H: 680 mm (26-25/32") D: 272 mm (10-23/32")
Weight (Net)	20.5 kg (45.2 lbs.)
Enclosure Finish	Top, Side and Bottom are in Simulated Walnut-Grain Finish.

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

A product of  
**TRIO-KENWOOD CORPORATION**  
6-17, 3-chome, Aobadai, Meguro-ku, Tokyo 153, Japan

**KENWOOD ELECTRONICS, INC.**  
1315 E. Watsoncenter Rd, Carson, California 90745  
75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.  
**TRIO-KENWOOD ELECTRONICS, N.V.**  
Leuvensesteenweg 504 B-1930 Zaventem, Belgium  
**TRIO-KENWOOD ELECTRONICS GmbH**  
Rudolf-Braas-Str. 20, 6056 Heusenstamm, West Germany  
**TRIO-KENWOOD FRANCE S.A.**  
5, Boulevard Ney, 75018 Paris, France  
**TRIO-KENWOOD SVENSKA AB**  
Kemistvagen 10A, S-183 21 Taby, Sweden  
**TRIO-KENWOOD (AUSTRALIA) PTY. LTD.**  
30 Whiting St., Artarmon, N.S.W. 2064, Australia  
**KENWOOD & LEE ELECTRONICS, LTD.**  
Room 501, Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong